



ECLIPS
inventive engineering


20 ft Refrigerated ISO Cargo Container

20 ft Refrigerated ISO Cargo Container



PRODUCT FEATURES

- > Steel sides and roof
- > Double full opening swing doors on one end with padlocks
- > Forklift pockets
- > Aluminium T-grade floors
- > Refrigerated machinery features electrical supply as follows:
208/230, 380/460 Volts AC,
3 phase, 50 or 60 cycle
- > Temperature range from -30 °C to 21 °C (-20 °F to 70 °F)

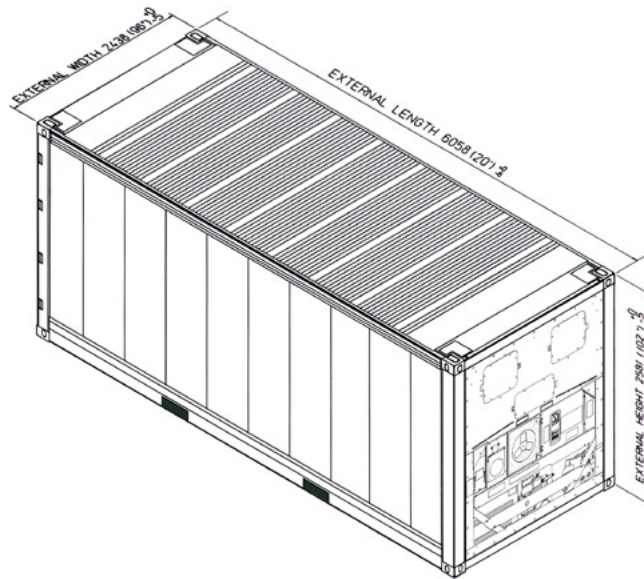

20 FT REEFER SPECIFICATIONS

	Length		Height		Width		Door Opening	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
mm	6058	5321	2591	2248	2438	2235	2248	2235
ft in	19' 10 1/2"	17' 5 1/2"	8' 6"	7' 4 1/2"	8' 0"	7' 4"	7' 4 1/2"	7' 4"

	Tare Weight	Maximum Payload	Maximum Gross Weight	Cubic Capacity
kg	3120	27,360	30,480	26.7 m ³
lb	6880	60,320	67,200	944 cu ft

ECLP-1209776239-1484
v1.0



ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD
ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS



WWW.ECLIPS.ENGINEERING

P: 1300 ECLIPS
E: info@eclips.engineering