



**ECLIPS**  
inventive engineering


## 40 ft Refrigerated ISO Cargo Container



40 ft Refrigerated ISO Cargo Container

### PRODUCT FEATURES

- > Steel sides and roof
- > Double full opening swing doors on one end with padlocks
- > Forklift pockets
- > Aluminium T-grade floors
- > Refrigerated machinery features electrical supply as follows:  
208/230, 380/460 Volts AC,  
3 phase, 50 or 60 cycle
- > Temperature range from -30 °C  
to 21 °C (-20 °F to 70 °F)

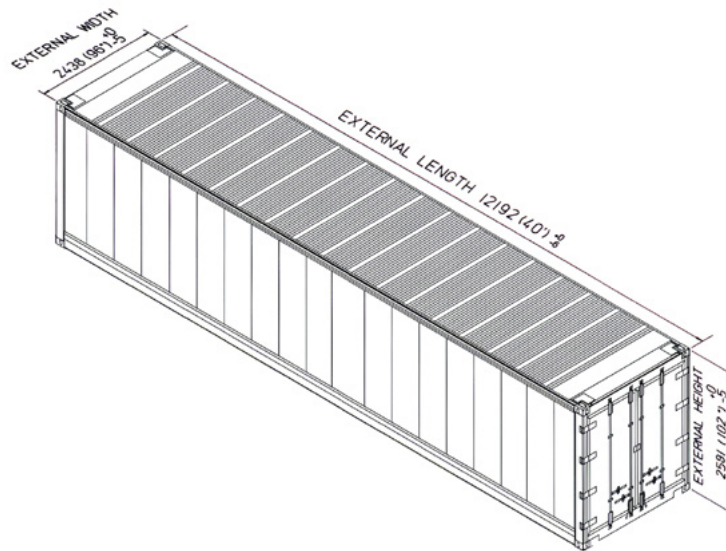

ECLP-1209776239-  
1966\_v1

### 40 FT REEFER SPECIFICATIONS

|              | Length   |          | Height   |           | Width    |           | Door Opening |           |
|--------------|----------|----------|----------|-----------|----------|-----------|--------------|-----------|
|              | Exterior | Interior | Exterior | Interior  | Exterior | Interior  | Height       | Width     |
| <b>mm</b>    | 12,192   | 11,602   | 2591     | 2226      | 2438     | 2276      | 2299         | 2276      |
| <b>ft in</b> | 40' 0"   | 38' 3/4" | 8' 6"    | 7' 3 5/8" | 8' 0"    | 7' 5 5/8" | 7' 6 1/2"    | 7' 5 5/8" |

|           | Tare Weight | Maximum Payload | Maximum Gross Weight | Cubic Capacity      |
|-----------|-------------|-----------------|----------------------|---------------------|
| <b>kg</b> | 4350        | 26,130          | 30,480               | 58.8 m <sup>3</sup> |
| <b>lb</b> | 9590        | 57,610          | 67,200               | 2076 cu ft          |

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD  
ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

