




ECLIPS
inventive engineering

Bicon Refrigerated ISO Cargo Container



PRODUCT FEATURES

- > Steel sides and roof
- > Double full opening swing doors on one end with padlocks
- > Forklift pockets
- > Aluminium T-grade floors
- > Refrigerated machinery features electrical supply as follows:
208/230, 380/460 Volts AC,
3 phase, 50 or 60 cycle
- > Temperature range from -30 °C to 21 °C (-20 °F to 70 °F)

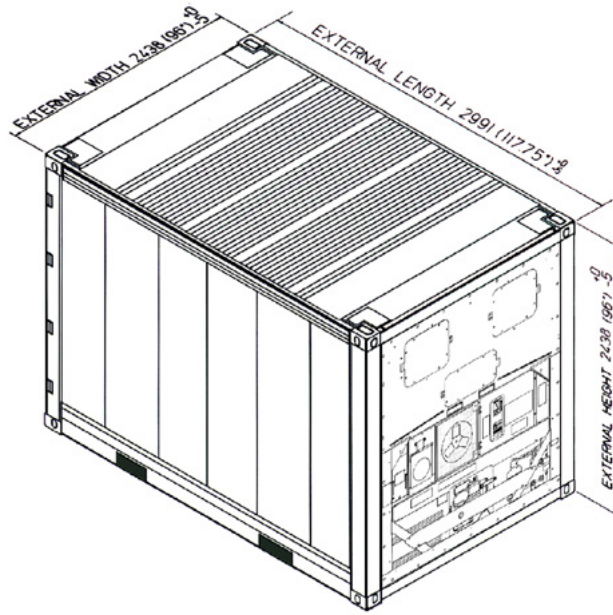

Bicon Refrigerated ISO Cargo Container

ECLP-1209776239-1950_v1

BICON REEFER SPECIFICATIONS

	Length		Height		Width		Door Opening	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
mm	2991	2254	2438	2096	2438	2235	2096	2235
ft in	9' 9 3/4"	7' 4 3/4"	8' 0"	6' 10 1/2"	8' 0"	7' 4"	6' 10 1/2"	7' 4"

	Tare Weight	Maximum Payload	Maximum Gross Weight	Cubic Capacity
kg	1940	10,060	12,000	10.6 m ³
lb	4275	22,180	26,455	373 cu ft

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD
ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

