



ECLIPS
inventive engineering


Bicon Refrigerated ISO Cargo Container

ECL
Bicon Refrigerated ISO Cargo Container



PRODUCT FEATURES

- > Steel sides and roof
- > Double full opening swing doors on one end with padlocks
- > Forklift pockets
- > Aluminium T-grade floors
- > Refrigerated machinery features electrical supply as follows:
208/230, 380/460 Volts AC,
3 phase, 50 or 60 cycle
- > Temperature range from -30 °C to 21 °C (-20 °F to 70 °F)

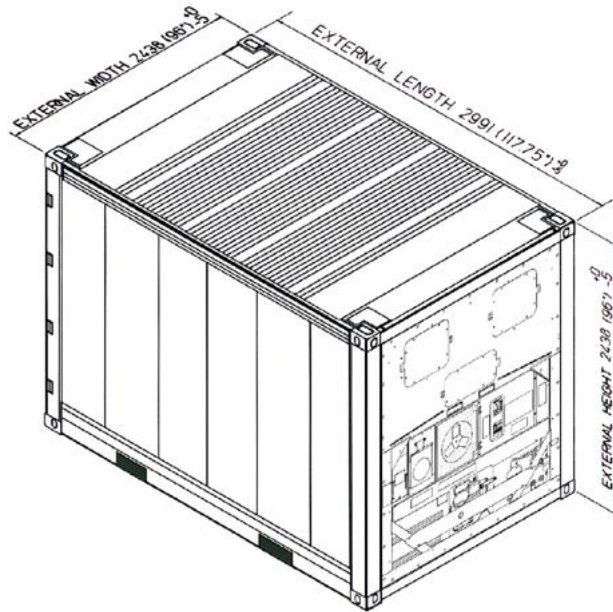

BICON REEFER SPECIFICATIONS

	Length		Height		Width		Door Opening	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
mm	2991	2254	2438	2096	2438	2235	2096	2235
ft in	9' 9 3/8"	7' 4 3/8"	8' 0"	6' 10 1/2"	8' 0"	7' 4"	6' 10 1/2"	7' 4"

	Tare Weight	Maximum Payload	Maximum Gross Weight	Cubic Capacity
kg	1940	10,060	12,000	10.6 m ³
lb	4275	22,180	26,455	373 cu ft

SBI-100447_v2-0

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD
ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

